




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification <sup>6</sup> : <b>H01Q 21/28, 1/32, 1/38, 1/12, 1/44, 23/00</b>		A1	(11) International Publication Number: <b>WO 99/66595</b>
			(43) International Publication Date: 23 December 1999 (23.12.99)
(21) International Application Number: PCT/GB99/01860 (22) International Filing Date: 11 June 1999 (11.06.99) (30) Priority Data: 9813130.3                      17 June 1998 (17.06.98)                      GB (71) Applicant (for all designated States except US): HARADA INDUSTRIES (EUROPE) LIMITED [GB/GB]; Bell Heath Way, Woodgate Business Park, Clapgate Lane, Birmingham B32 3BZ (GB). (72) Inventor; and (75) Inventor/Applicant (for US only): THOMPSON, Alan [GB/GB]; Harada European Technology Centre, Research and Development Building, University of Kent, Canterbury, Kent CT2 7PD (GB). (74) Agents: MOIR, Michael, Christopher et al.; Mathys & Squire, 100 Grays Inn Road, London WC1X 8AL (GB).			(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.

(54) Title: ANTENNA ASSEMBLY

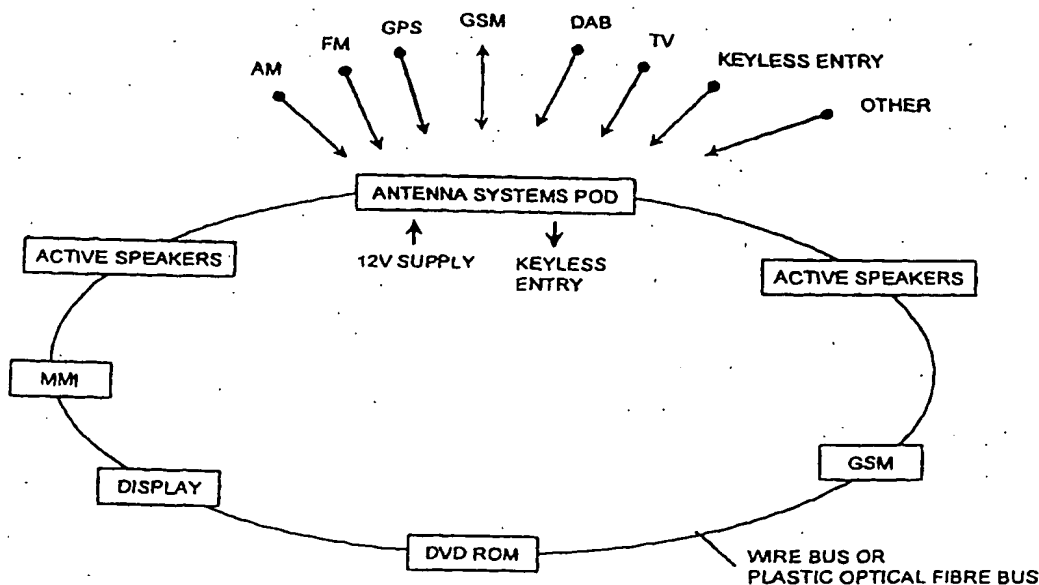

## (57) Abstract

An antenna module for a road vehicle comprising a structure including a plurality of antennas having different functions and configured to be mounted on or conform to a surface of the vehicle, a data bus for conveying in a digital format, signals received by or to be transmitted by the antenna between the module and equipment comprised in the vehicle, and means for converting received signals into said format and for converting signals to be transmitted from that format into a form for transmission.

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

### Antenna Assembly

This invention relates to an antenna assembly of modular form for use in road vehicles.

For many years a single antenna was considered sufficient to satisfy the signal reception requirements of the AM/FM radio which is commonly installed in motor vehicles. In recent years additional antennas and associated diversity electronics have been introduced in order to eliminate or reduce the audio distortions that can be experienced when driving in a multipath signal environment.

As other services, such as mobile telephone (e.g. GSM) and global positioning by satellite (GPS), have been introduced, it has been necessary to add other antennas to the motor vehicle. Further services are planned which will lead to numerous other antennas also being added to the vehicle. More than twelve antenna elements could be required for the reception of existing and currently envisaged services.

The integration of so many antennas into a vehicle presents a number of problems in the design, manufacture, installation, test, servicing and upgrading phases of the product life-cycle.

Car-designers generally impose severe constraints in terms of the allocated space, the permitted locations, the mechanical interfaces, the electrical interfaces, etc for these antennas.

For a number of years car manufacturers have provided vehicles with antennas integrated into the rear windows, so-called glass antennas, in order to offer a lower cost alternative to the more familiar external whip or telescopic mast antennas. However, the system performance obtained with these glass antennas is often compromised because the shape or form of antennas for good electrical performance is generally not compatible with the dominant aesthetic requirements. This situation is aggravated when a large number of antennas are required. Connecting tracks are

used to route the signals from (or to) the glass antenna elements. Cross-over connections to these tracks are difficult to avoid and connections to screened cables and associated electronic assemblies are relatively expensive to implement reliably.

5 Glass antenna technology is used by the original equipment manufacturer and the antenna cannot be replaced or modified without replacing the window glass itself. Thus glass antenna technology is not appropriate for the upgrading of the antenna systems that may later be required when new services are introduced, or for the after-market.

10 The present invention, at least in its preferred embodiments, seeks to avoid at least some of these disadvantages. In principle it is applicable equally to transmitting antennas and receiving antennas, and the claims are to be interpreted accordingly.

15 In one aspect the invention provides an antenna module for a road vehicle comprising a structure including a plurality of antennas having different functions and configured to be mounted in or on the vehicle (preferably on or conforming to a surface thereof), a data bus for conveying in a digital format signals received by or to be transmitted by the antennas between the module and equipment comprised in the vehicle, and means for converting received signals into said format and for converting signals to be transmitted from that format into a form for transmission.

20 The antennas may provide for reception or transmission of two or more signals of the following types: FM broadcast radio, AM broadcast radio, digital audio broadcasts, analogue broadcast television, digital broadcast television, telephony, other two way radio communications, position fixing, station keeping, vehicle guidance, vehicle security, vehicle identification, tolling, emergency calls. 'Broadcast' includes both terrestrial and satellite transmissions, whether free-on-air or pay-to-receive.

25 The structure may contain active systems for signal processing before transmission or after reception.

The connection means may be adapted for conveying signals relating to vehicle security to or from the vehicle separately from other signals.

The data bus may be an optical bus.

5 Preferably the structure is of material substantially transparent to electromagnetic radiation.

At least one said antenna may be integrated into or disposed on the fabric of the structure.

10 Alternatively or in addition the structure may be a housing within which at least one said antenna is contained. The module may comprise means for mounting it on an external surface of the vehicle, and shaped to conform with the styling thereof, and/or to perform a aerodynamic function.

At least one said active system may be disposed within the housing. The module may be configured as a spoiler, fairing, airdam or fin.

15 At least one of the antennas may be a pattern of conductive material printed, etched or otherwise disposed on a dielectric substrate.

The module may be shaped to conform to a surface (eg. an inner surface) of a window, window surround or body panel of the vehicle.

Alternatively there may be means for mounting the module on an external surface of the vehicle, and shaped to conform with the styling thereof.

20 The module may be configured as a spoiler, fairing or fin for mounting towards the rear of the vehicle.

The invention will now be described merely by way of example with reference to the

accompanying drawings, wherein

Figure 1 illustrates the concept of the invention,

Figure 2 shows some possible locations in a vehicle for an antenna module according to the invention

5 Figure 3 is a system diagram of a module according to the invention, and

Figure 4 shows an antenna module according to the invention.

Because Figures 1 and 3 are fully captioned, reference numerals are not used in these figures. Instead the description of those figures will proceed using the captioned terms.

10 The antenna module consists of a pod or other structure shaped to conform to a suitable radio-transparent inner surface of the vehicle such as a window, a non-metallic panel such as a boot (trunk) lid, roof, wing or bumper (fender).

Referring to Figure 1, the antenna systems pod contains all the antennas necessary for the reception of signals which are required for the vehicle's in-car multimedia and  
15 communication facilities such as AM/FM radio, analogue/digital television, digital audio broadcasts (DAB), global positioning system (GPS), mobile telephony (GSM), keyless entry, etc.

The pod also contains the electronic sub-systems, including RF amplifiers, diversity chips, switches, tuner chips and transmitters that are required to provide some or all  
20 of the in-car facilities mentioned above.

The pod has few electrical interfaces: e.g. a 12V or other low voltage supply, a principal network connection for a single data bus (either an optical fibre or wire bus), and a separate connection to a keyless entry security system of the vehicle.

Referring to Figure 2, some possible mounting positions are shown for the pod in a typical modern vehicle, here a Volkswagen Passat. VOLKSWAGEN, PASSAT and the VW logo visible in Figure 2 are registered trade marks.

5 The locations illustrated are the top of the windscreen 20, the top 21 or bottom 22 of the rear window, the top of the fascia 23, and a rear spoiler 24.

To reduce costs, these positions should be considered as alternatives. However more than one pod may be used if optimisation of the performance of the various systems require it.

10 Where the pod is to be mounted on a window, it conveniently can consist of an antenna portion in which the antenna patterns are formed on a transparent flexible substrate for attachment to the window and a systems portion which is located just outside the window area, e.g. along the window frame or under an adjacent head lining.

15 A vehicle which employs composite panels presents a larger number of options for mounting positions. For example, the pod could be incorporated in, or conformably mounted against the airdam or fairing often fitted to the cab roof of an articulated tractor unit to reduce the drag or turbulence of a tall semi-trailer. Alternatively it could be conformably mounted behind the bumper or one of the several other glass-fibre body panels of a truck cab.

20 Figure 3 is a system block diagram of the functional units contained within the envelope of the pod. Optical signals, containing control data generated by a man machine interface in the vehicle (MMI, shown in Figure 1) are received, via the single optical bus, by a fibre optic transceiver and converted to electrical signals before being passed to a codec optical transceiver. The codec optical transceiver routes this control  
25 data to a microprocessor which then controls an AM/FM diversity tuner, a TV diversity tuner, a GPS receiver and engine, a GSM transmit/receive (TX/RX) module, a DAB tuner and other service items that are connected to an I<sup>2</sup>C bus within the pod.

The AM/FM diversity tuner receives its signals either from an AM antenna or from one of four FM antennas according to band selection. When tuned to the FM band, the diversity electronics of the FM tuner selects the antenna that offers the signal with the least multipath distortion. Alternatively the diversity electronics may apply  
5 amplitude and phase weighting to some or all of the signals received by the FM antennas in order to minimise the effects of multipath distortion.

Radio data system (RDS) information (information regarding the identity of the received station, traffic information etc) is passed to the codec optical transceiver via the RDS pre-processor and the microprocessor. Audio signals are also passed to the  
10 codec optical transceiver.

The diversity electronics of the TV tuner selects one of four TV antennas that offers the signal with the least multipath distortion. Alternatively the diversity electronics may apply amplitude and phase weighting to some or all of the signals received by the TV antennas in order to minimise the effects of the multipath distortion. Video and  
15 audio signals from the TV diversity tuner are passed to the codec optical transceiver.

The GPS receiver and engine, GSM TX/RX module, DAB tuner and the other services each receive signals from their respective antennas. Amongst other services envisaged for the future are road tolling, station keeping relative to the preceding vehicle (the pod would then be mounted to accommodate the necessary forward-looking antenna)  
20 and vehicle guidance when the necessary highway infrastructure systems are in place.

The codec optical transceiver receives GPS data, GSM data, DAB data and other data from the GPS receiver and engine, GSM TX/RX module, DAB tuner and other services respectively.

All the data, including status data, received by the codec optical transceiver is  
25 processed (in particular digitised, if not already digital) and packed into frames if necessary for the transmission protocol before being passed to a second fibre optic transceiver for transmission to the other devices (shown in Figure 1) are connected to



the single optical network (bus).

For security and safety reasons the control signal from the keyless entry receiver and decoder preferably is not sent with the other data over the optical network but is sent separately to the car security system. However in some circumstances, eg. an  
5 adequately high level of encryption or security, the keyless entry signals may be sent via the optical network.

The single network connection carries communications from all the antennas to the control unit and other devices on the network. The data is coded and transmitted using a common protocol for the devices. One such example of a protocol is called  
10 MOST - Media Orientated Systems Transport. The network passes the coded digital information in a common format so that the central processor can communicate with all other devices. The MOST network is wide bandwidth so that the multimedia data can be transferred using a single system clock. Alternatively asynchronous packet data can be handled as well. The bandwidth is programmable in real time and one node  
15 can communicate with another unencumbered. Since the intelligence is in the network it is suitable for consumer electronics applications. The network can be optimised for the chosen peripheral devices connected.

Figure 4 shows an open view of the pod. It comprises a two-part housing or casing, the upper part of the casing (not shown) having been removed from the lower part of  
20 the casing 1, to reveal an antenna board 2 and the system electronics modules 3.

The casing of the pod is made of plastics or other suitably rigid composite material that is transparent to electromagnetic radiation. The casing is shaped to conform to the window and body of the car or, when mounted as a spoiler, to the aerodynamic and aesthetic requirements.

25 The antenna board comprises a copper clad laminate and provides the numerous antennas. These are formed either by etching the copper of the antenna board or by mounting separate antennas on the antenna board. Other known methods of antenna

construction may be used, e.g. screen printing a silver layer in the required patterns.

In this example, the AM antenna comprises wire windings on a ferrite rod 4. The FM antennas consist of a bow-tie dipole antenna 5, and fractal antennas 6,7 and 8.

The TV antennas are shown as bow-tie dipoles 9, 10, 11 and 12.

- 5     The GPS antenna is a patch antenna 13, the GSM antenna is formed by a slot 14 and the keyless entry antenna is also formed by a slot 15. The antennas for the other services (not shown) would take the appropriate form according to the frequency of operation and radiation pattern requirements.

- 10    Connecting lines (not shown) from the numerous antennas to electronics modules are made either by means of tracks etched in the copper of the antenna board or by means of coaxial cables or by a combination of these means.

As an alternative to a separate antenna board, some or all of the antennas may be printed or etched on the surface of the casing itself, or may be integrated into it (potted) when the casing is manufactured, e.g. by injection moulding.

- 15    Some benefits offered by the antenna module as described include:

The costs and constraints of glass antennas are avoided.

Complex systems are more easily accommodated.

Cross-over of tracks is permitted.

Electrical and mechanical interfaces are simplified.

- 20    Cable harnesses are almost eliminated.

All antennas and sub-systems can be tested prior to installation in the vehicle.

Mounting can be either internal or external.

Upgrading of systems can be accommodated.

The concept can be applied both to the OEM and after-markets.

5      Servicing is simplified.

The invention also includes any novel features or combination of features disclosed in the specification (which term includes the claims) whether or not presently claimed.

**Claims**

1. An antenna module for a road vehicle comprising a structure including a plurality of antennas having different functions and configured to be mounted in or on the vehicle, a data bus for conveying in a digital format signals received by or to be transmitted by the antenna between the module and equipment comprised in the vehicle, and means for converting received signals into said format and for converting signals to be transmitted from that format into a form for transmission.
2. A module as claimed in claim 1 wherein the antennas provide for reception and/or transmission of two or more signals of the following types: FM broadcast radio, AM broadcast radio, digital audio broadcasts, analogue broadcast television, digital broadcast television, telephony, other two way radio communications, position fixing, station keeping, vehicle guidance, vehicle security, vehicle identification, tolling, emergency calls.
3. A module as claimed in claim 1 or claim 2 comprising an antenna providing for reception and/or transmission of signals relating to vehicle security, and means for conveying signals relating to vehicle security to or from the vehicle separately from other signals.
4. A module as claimed in any preceding claim wherein the data bus is an optical bus.
5. A module as claimed in any preceding claim wherein the structure is of material substantially transparent to electromagnetic radiation.
6. A module as claimed in any preceding claim wherein at least one said antenna is integrated into or disposed on the fabric of the structure.

7. A module as claimed in any preceding claim wherein the structure is a housing within which at least one said antenna is contained.
8. A module as claimed in claim 3 or any claim dependent thereon wherein the structure is a housing, and at least one said active system is disposed within the housing.
9. A module as claimed in any of claims 8, 9 or 10 wherein at least one said antenna is a pattern of conductive material printing, etched or otherwise disposed on a dielectric substrate.
10. A module as claimed in any preceding claim, shaped to conform to a surface of a window, window surround or body panel of the vehicle.
11. A module as claimed in any of claims 1 to 9, comprising means for mounting it on an external surface of the vehicle, and shaped to conform with the styling thereof, and/or to perform an aerodynamic function.
12. A module as claimed in claim 11, configured as a spoiler, fairing, airdam or fin.

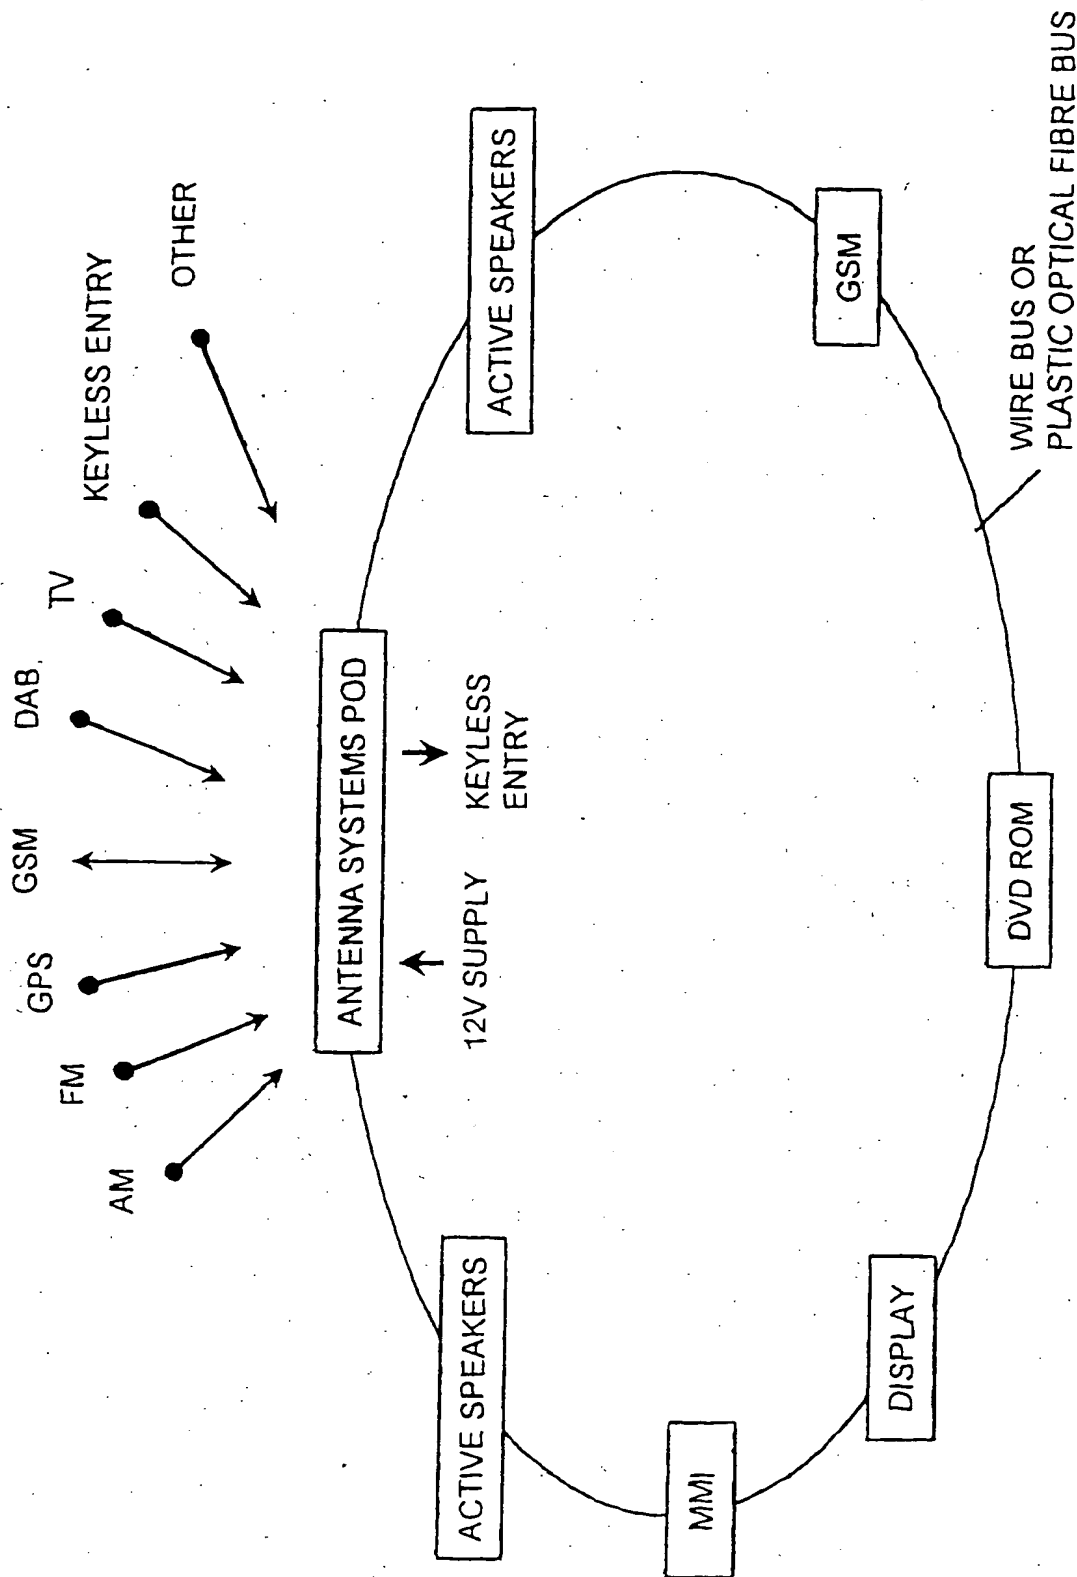


Figure 1

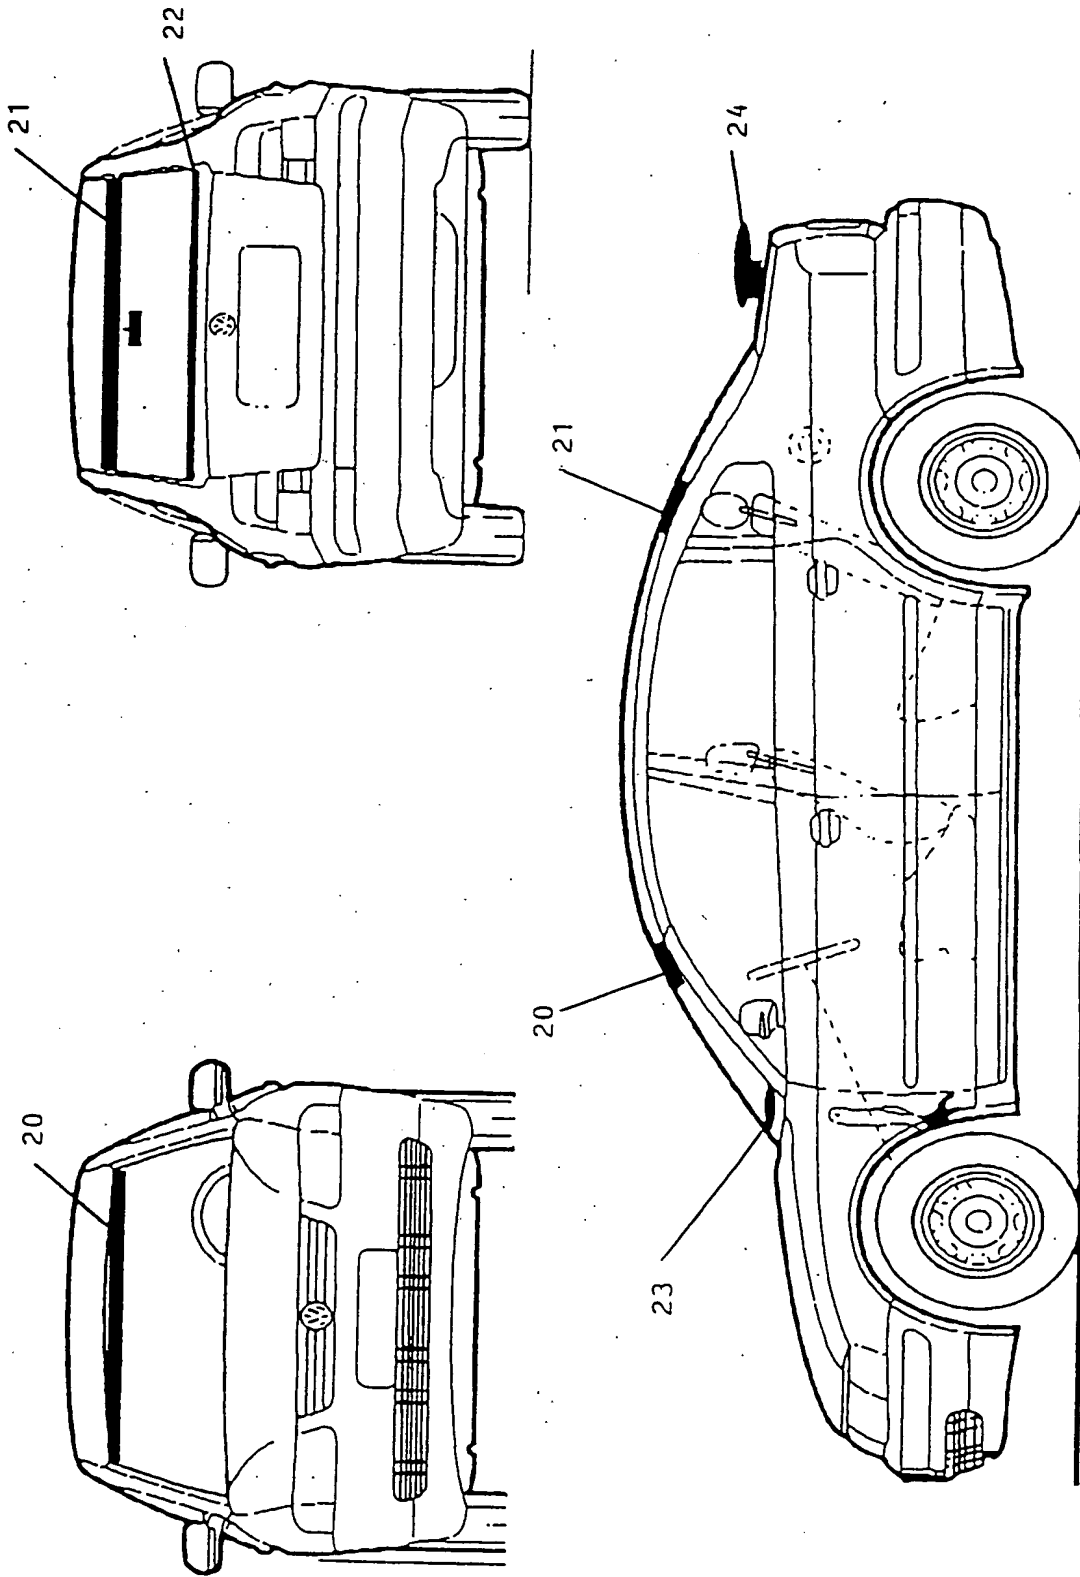


Figure 2

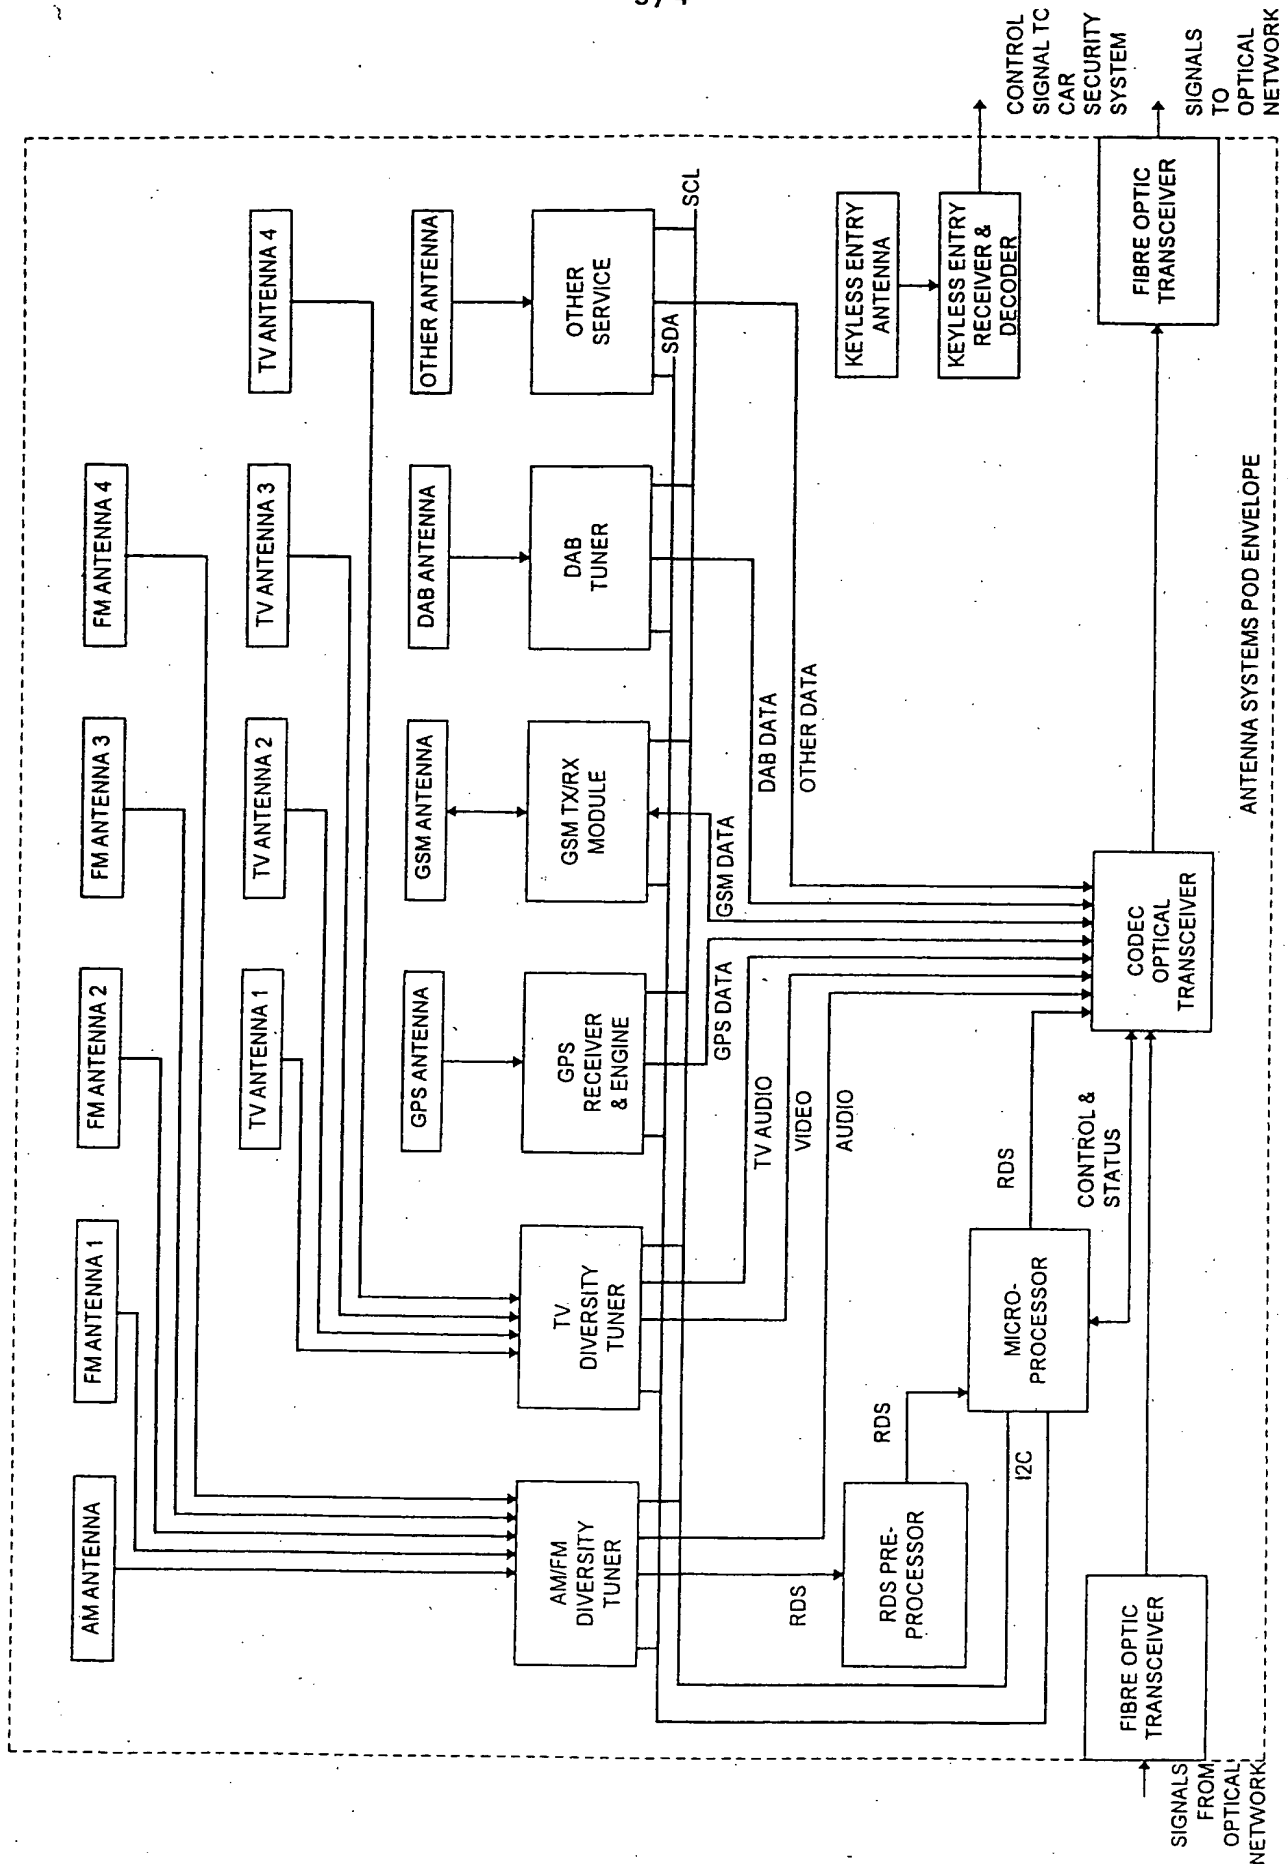


Figure 3



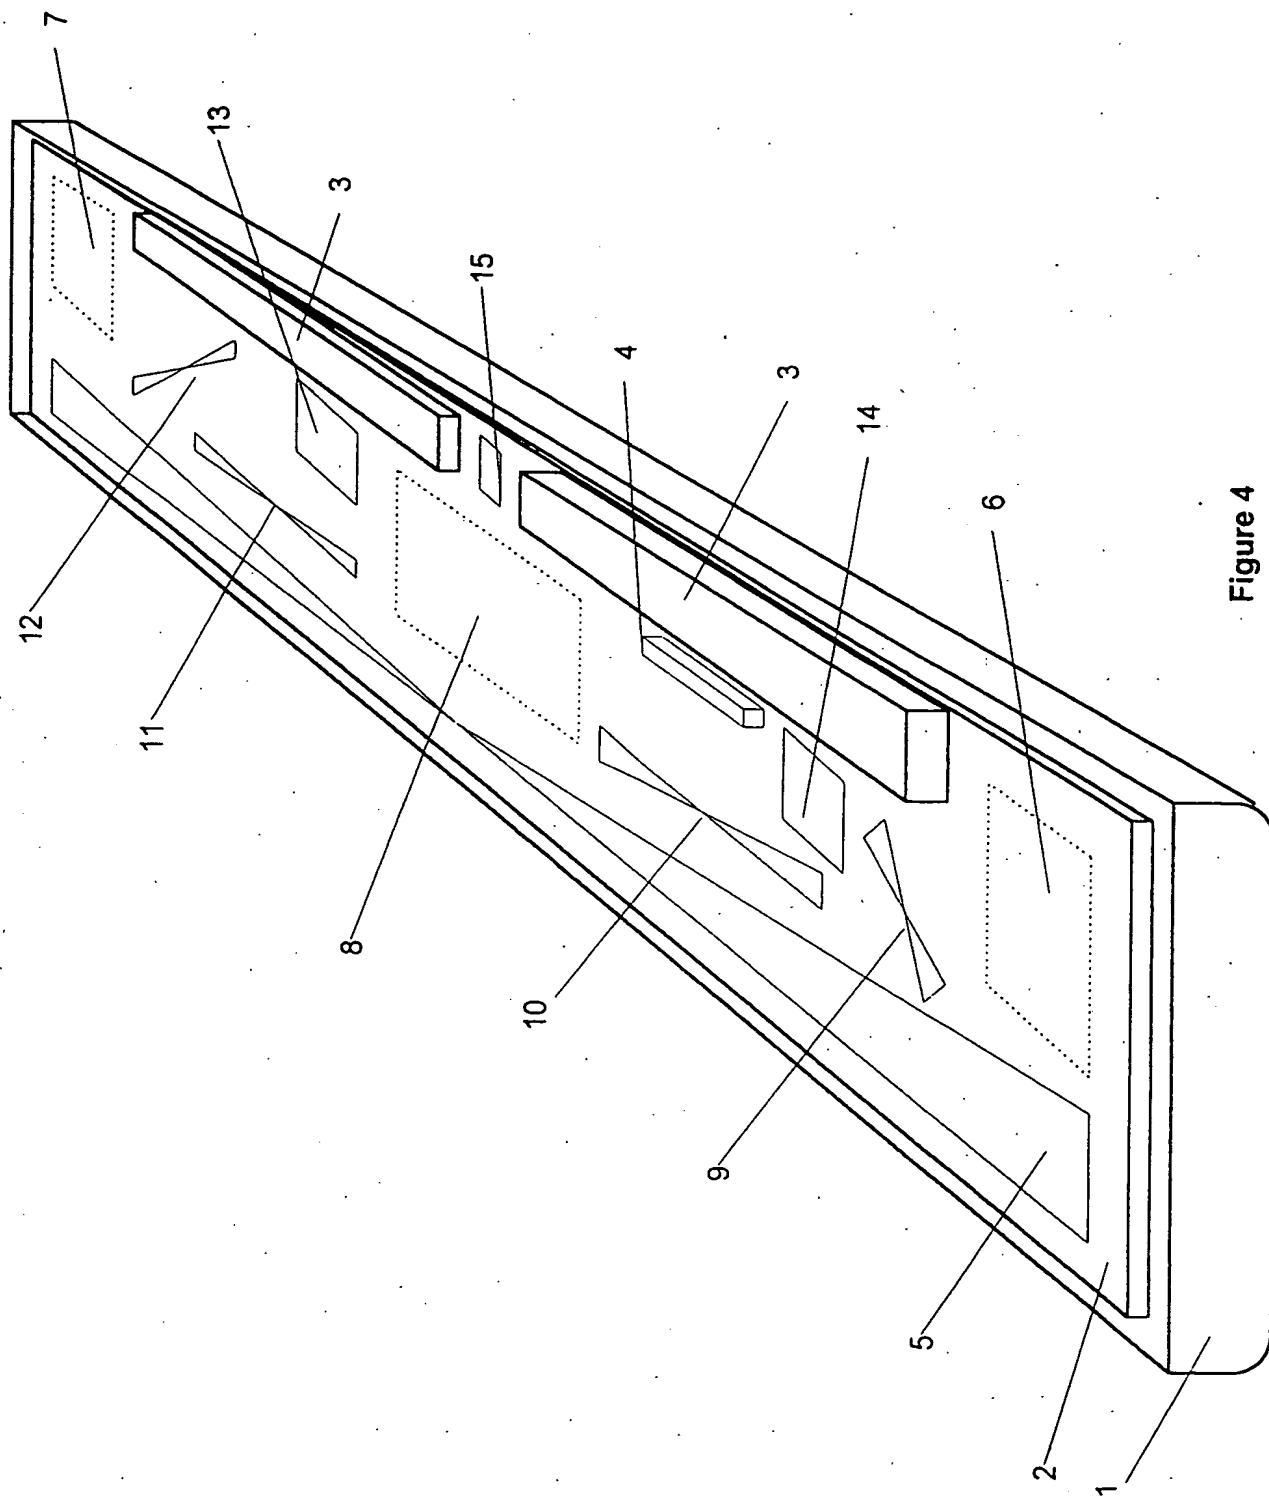


Figure 4

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 H01Q21/28 H01Q1/32 H01Q1/38 H01Q1/12 H01Q1/44  
H01Q23/00

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H01Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 400 039 A (ARAKI HIROSHI ET AL) 21 March 1995 (1995-03-21) the whole document	1-3, 5-9
A	EP 0 590 955 A (LORAL AEROSPACE CORP) 6 April 1994 (1994-04-06) the whole document	2, 3
P, A	WO 99 13526 A (ANDREW CORP) 18 March 1999 (1999-03-18) page 7, line 18 - line 29 page 8, line 7-12 page 8, line 20-24 page 11, line 28 - page 15, line 12; figures 1-3  -/-	1, 2, 5-7, 9-11

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

14 September 1999

Date of mailing of the international search report

21/09/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Van Dooren, G

## INTERNATIONAL SEARCH REPORT

International Application No

PCT/GB 99/01860

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P, A	EP 0 856 905 A (HARADA IND CO LTD) 5 August 1998 (1998-08-05) the whole document ----	1, 2, 5, 6, 9-11
A	US 4 370 658 A (HILL FRED G) 25 January 1983 (1983-01-25) column 2, line 16-37 column 4, line 21 -column 7, line 45 ----	5-7, 10-12
A	EP 0 806 851 A (BECKER GMBH) 12 November 1997 (1997-11-12) claim 5; figure 1 -----	1, 4

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5400039	A	21-03-1995	JP 2840493 B	24-12-1998
			JP 5183328 A	23-07-1993
			DE 4244136 A	01-07-1993
			DE 4244971 C	05-08-1999
			US 5628053 A	06-05-1997
EP 0590955	A	06-04-1994	US 5300936 A	05-04-1994
			JP 2553299 B	13-11-1996
			JP 6132714 A	13-05-1994
WO 9913526	A	18-03-1999	AU 9212698 A	29-03-1999
EP 0856905	A	05-08-1998	JP 10215114 A	11-08-1998
US 4370658	A	25-01-1983	NONE	
EP 0806851	A	12-11-1997	DE 19618755 A	13-11-1997